

www.hazalguvenlik.net



Hydraulic Road Blocker

Standart 800 mm

Data Sheet

www.hazalguvenlik.net

Hydraulic Road Blocker





Height when raised	800 mm (optional)
Length	5000 mm
Weight (approximately)	2200 kg
Axle load	22 tons
Top plate	12 mm Plain, painted to yellow with black stripes
Type of steel	S235/RAEX250-Quality 37 minimum
Hydraulic Features	Hydraulic Control Unit and 2 pcs Piston
Hinges	reinforced steel
Power	380 V, 3 Phase, 50-60 Hz
Power failure	Manual hand pump
Raise lower time	4-6 seconds - in emergency 1.5 seconds (optional)
Desktop keyboard	Uninstall , download
Controller Type	PLC Electronic Control Unit
Loop detector	This detector is used for safety
Power Back-up system (options)	Hydraulic accumulator, DC motor and batteries, UPS
Cabinet	IP 65 with continuous ventilation
Motor Power	Min 4 KW, 1500 rpm
Environmental	-20 °C and +75 °C

conditions

Available, 100mm diameter, steel post 2 mt height (optional)

Red/green LED
traffic light

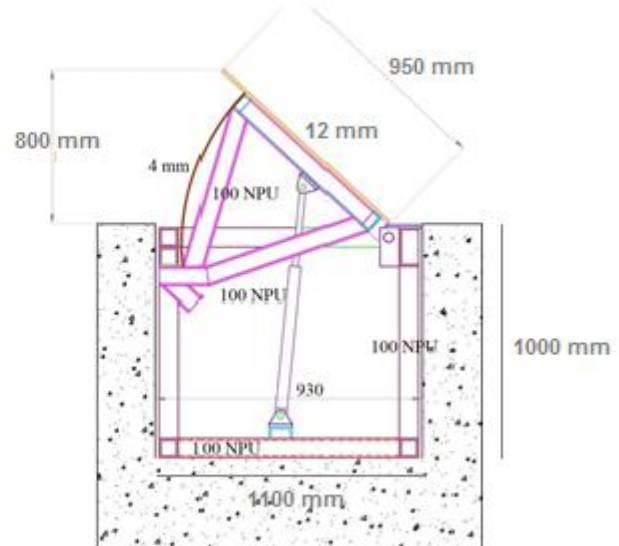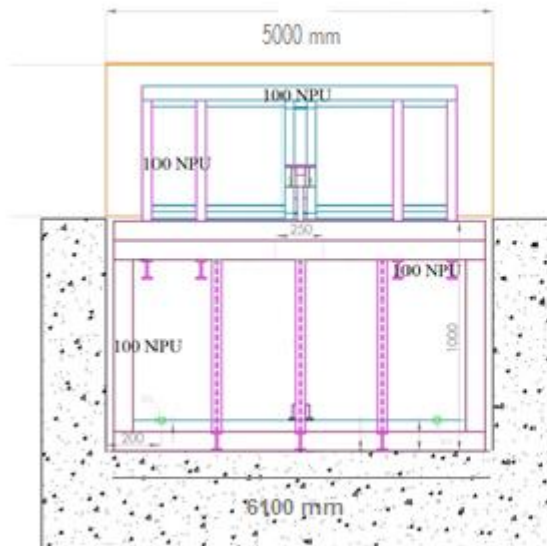



Doğuş Mah Ballıbaba Sok No : 67/3 K.Esat / Çankaya / ANKARA

Tif : + 90 312 478 2028 – + 90 312 482 0484

www.hazalguvenlik.net - info@hazalguvenlik.net