

[www.hazalguvenlik.net](http://www.hazalguvenlik.net)



**Hydraulic Road Blocker**

**Standart 800 mm**



**Data Sheet**

[www.hazalguvenlik.net](http://www.hazalguvenlik.net)

## Hydraulic Road Blocker



Height when raised	800 mm ( optional )
Length	6000 mm
Weight (approximately)	2400 kg
Axle load	22 tons
Top plate	12 mm Plain, painted to yellow with black stripes
Type of steel	S235/RAEX250-Quality 37 minimum
Hydraulic Features	Hydraulic Control Unit and 2 pcs Piston
Hinges	reinforced steel
Power	380 V, 3 Phase, 50-60 Hz
Power failure	Manual hand pump
Raise lower time	4-6 seconds - in emergency 1.5 seconds (optional)
Desktop keyboard	Uninstall , download
Controller Type	PLC Electronic Control Unit
Loop detector	This detector is used for safety
Power Back-up system (options)	Hydraulic accumulator, DC motor and batteries, UPS
Cabinet	IP 65 with continuous ventilation
Motor Power	Min 4 KW, 1500 rpm
Environmental conditions	-20 °C and +75 °C
Red/green LED traffic light	Available, 100mm diameter, steel post 2 mt height (optional)

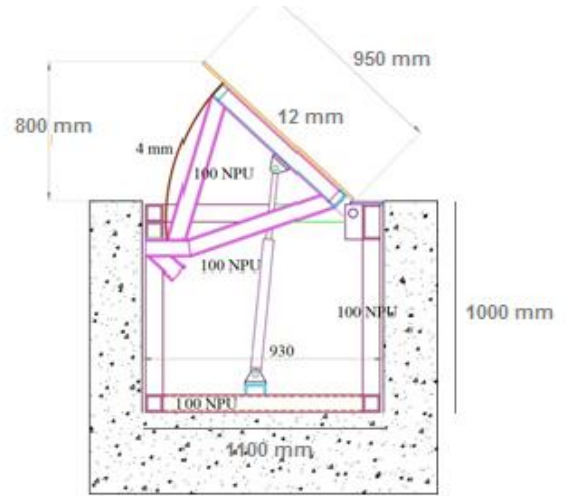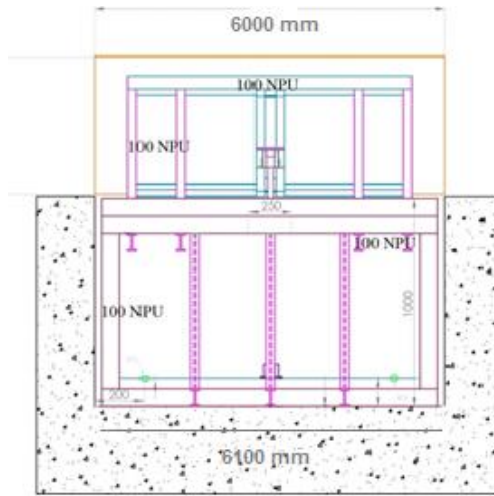

[www.hazalguvenlik.net](http://www.hazalguvenlik.net)

[www.hazalguvenlik.net](http://www.hazalguvenlik.net)



Doğuş Mah Ballıbaba Sok No : 67/3 K.Esat / Çankaya / ANKARA

Tif : + 90 312 478 2028 – + 90 312 482 0484

[www.hazalguvenlik.net](http://www.hazalguvenlik.net) - [info@hazalguvenlik.net](mailto:info@hazalguvenlik.net)

[www.hazalguvenlik.net](http://www.hazalguvenlik.net)