

www.hazalguvenlik.net




HYDRAULIC CHAIN BARRIER

www.hazalguvenlik.net

HYDRAULIC CHAIN BARRIER



DRIVE	: Hydraulic
DRIVE POWER	: Min 10 Bars / Max 120 Bars
CHAIN LENGTH MAXIMUM	: 20 meters (standard)
CYLINDER RADIUS	: 220 mm
OBSTACLE HEIGHT	: 500 mm
CYLINDER WIDTH	: 10 mm
METERIAL	: Static Paint
RISING / FALLING TIME	: 4 Sec / 6 Sec
POWER SUPPLY	: 380 VAC / 50-60 Hz.
CONSUMPTION	: 3 KW
PROTECTION CLASS	: IP 65
CONTROL PANEL	: PLC,Programmeable for Integration With Various Systems
OPERATION TEMPERATURES	: + 70 °C / - 15 °C
MANUAL OPERATION	: Ascending and Descendding with Manual Hand Pump
OPERATION	: Compatible With any king of Standart Interface , Button (standard)Remote Control , RFID , Camera , Proximty Card (optional)
HYDRAULIC OIL	: No 46
CERTIFICATION	: CE , ISO 9001 : 2008
WARRANTY	: 2 Years
ACCESORIES	: Oil Level and Temperarature Indicator,Manometer,Led Strip (Standard) Traffic Lights,Flashing Ling, Siren,Warning Sing, Drainage Pump (optional)

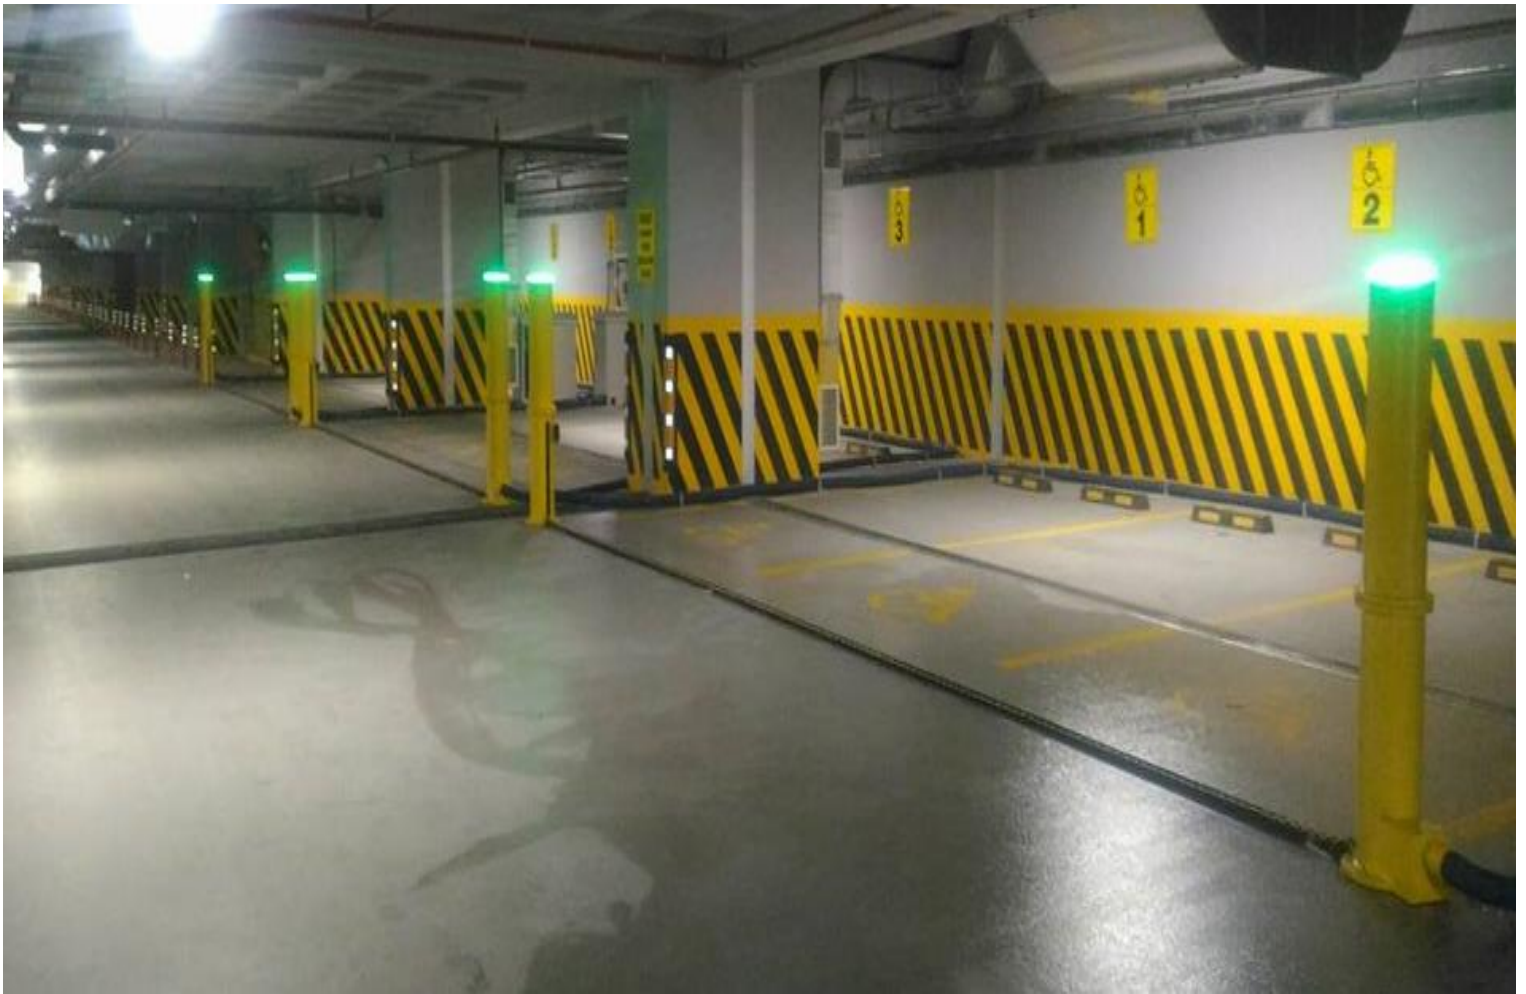



Doğuş Mah Ballıbaba Sok No : 67/3 K.Esat / Çankaya / ANKARA

Tif : + 90 312 478 2028 – + 90 312 482 0484

www.hazalguvenlik.net - info@hazalguvenlik.net