

www.hazalguvenlik.net



Hydraulic Road Blocker

K4 Standart 800 mm



Data Sheet

www.hazalguvenlik.net

Hydraulic Road Blocker (Standard K4)



| | |
|-------------------------------------|---|
| Height when raised | 800 mm |
| Length | 4000 mm |
| Weight (approximately) | 1500 kg |
| Axle load | 22 tons |
| Top plate | Plain, painted to yellow with black stripes |
| Type of steel | S235/RAEX250-Quality 37 minimum |
| Red/green LED traffic light | Available, 100mm diameter, steel post 2 mt height (optional) |
| Hinges | reinforced steel |
| Power | 380 V, 3 Phase, 50-60 Hz |
| Power failure | Manual hand pump |
| Raise lower time | 3-6 seconds - in emergency 1.5 seconds (optional) |
| Desktop keyboard | Raise, lower, emergency stop, key operated, 'keyboard in use' light indicator |
| Controller Type | PLC Electronic Control Unit |
| Loop detector | This detector is used for safety |
| Power Back-up system (options) | Hydraulic accumulator, DC motor and batteries, UPS |
| Cabinet | IP 65 with continuous ventilation |
| Motor Power | Min 4 KW, 1500 rpm |
| Environmental conditions | -20 °C and +75 °C |

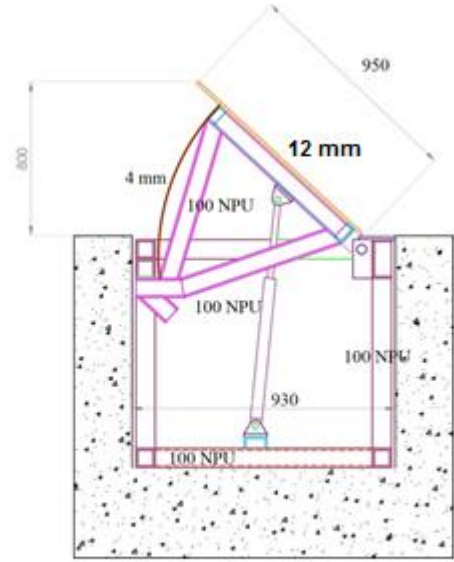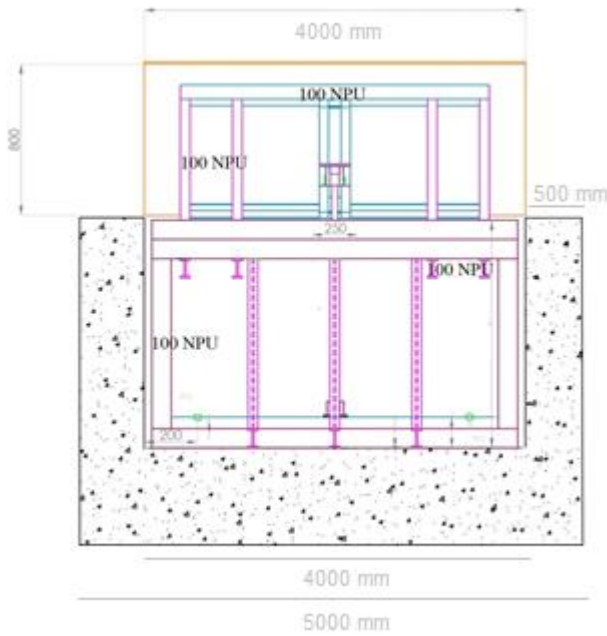



Doğuş Mah Ballıbaşa Sok No : 67/3 K.Esat / Çankaya / ANKARA

Tif : + 90 312 478 2028 – + 90 312 482 0484

www.hazalguvenlik.net - info@hazalguvenlik.net